

Q


Search UniFi products

All > [Electric Lock](#)

Datasheet

Marketing Images

Installation Guide

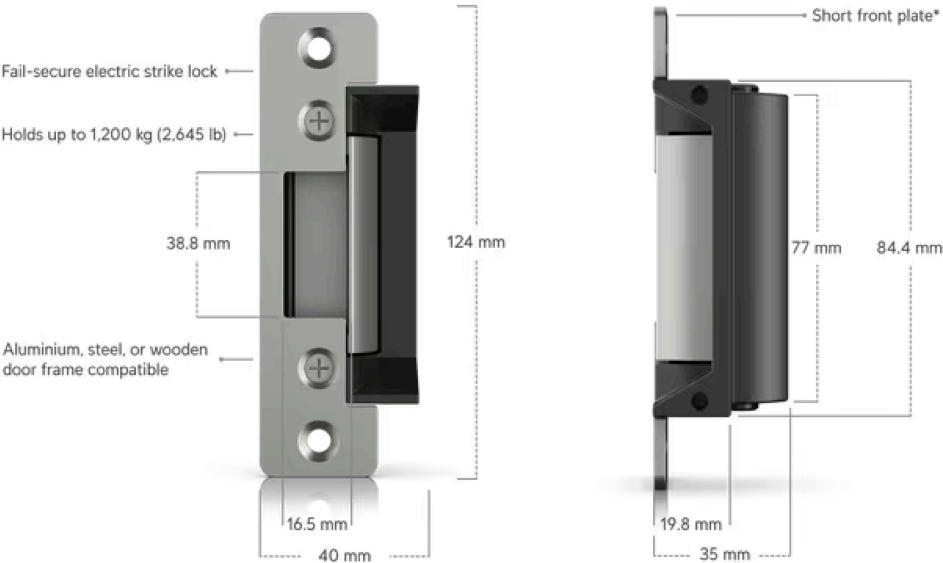

\*The short and long front plates are included.

^ Mechanical

Dimensions

Lock body: 80 x 40 x 35 mm (3.2 x 1.6 x 1.4")  
Short front plate: 124 x 32 x 3 mm (4.9 x 1.3 x 0.1")  
Long front plate: 202 x 36 x 3 mm (7.9 x 1.4 x 0.1")

Weight

Lock body: 185 g (6.5 oz)  
Short front plate: 50 g (1.8 oz)  
Long front plate: 130 g (4.6 oz)

Enclosure Material

Lock body: zinc alloy  
Front plate/latches: stainless steel

^ **Hardware**

Holding Force	Lock: 1,200 kg (2,645 lb)
Type	Fail secure lock Single door
Wiring Connection	Connect the two screw terminal separately to powered lock relay on UA-Hub: NO, COM
Current Power	400mA ±10%
Supported Voltage Range	12V DC
Compatibility	Wooden, steel, aluminum door
Screw Terminal	+ and -
Ambient Operating Temperature	-10 to 45° C (14 to 113° F)
Ambient Operating Humidity	5 to 90% noncondensing
NDAA Compliant	✓
Certifications	FCC, IC, CE

**Stay in Touch**

Email



Subscribe

