

Q

UVC-G5-BULLET-3



Bullet > [G5 Bullet](#)

Datasheet

In The Box

Marketing Images

Installation Guide

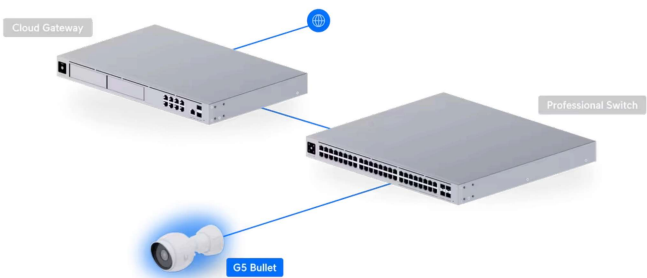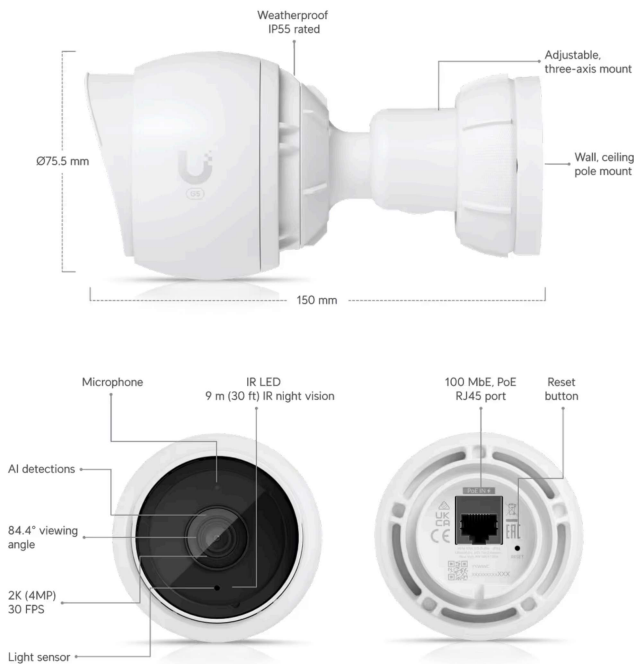

Overview

Dimensions

IR Night Vision

Without mount: Ø75.5 x 74.4 mm
(Ø3 x 2.9")

With mount: Ø75.5 x 150 mm
(Ø3 x 5.9")

9 m (30 ft)

Smart Detections (People, Vehicles, Animals)	✓
Resolution	2K
Field of View	H: 84.4°, V: 45.4°, D: 99.8°
Audio	Microphone
Weatherproofing	IP55
Tamper Resistance	IK04
Mounting	Wall, ceiling, pole mount (Included) Junction box (Optional)

^ **Performance**

Networking Interface	10/100 MbE RJ45 port
Video	
Image Settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay
Max. Frame Rate	30 FPS
Resolution	4MP 2688 x 1512 (16:9)
Optics	
Sensor	5MP CMOS
Lens	Fixed focal length
Night Mode	Built-in IR LED illumination and IR cut filter

^ **Hardware**

Max. Power Consumption	4W
Supported Voltage Range	37—57V DC
Power Method	PoE
Processor	Dual-core Arm® Cortex®-A7 based chip
Pole Mount Diameter	3/4" (19 mm)
Weight	Without mount: 225 g (8 oz) With mount: 315 g (11.1 oz)



Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Wall mount: aluminum alloy, polycarbonate Pole mount: aluminum alloy
Button	(1) Factory-reset
Ambient Operating Temperature	-20 to 40° C (-4 to 104° F)
Ambient Operating Humidity	0 to 90% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

Stay in Touch

Email



Subscribe

