

Tech Specs

UniFi UISP Branding


WiFi Switching Cloud Keys & Gateways Camera Security Door Access Power Tech New Int

Door Access > [G2 Starter Kit Pro](#)

Datasheet

Marketing Images

Installation Guide

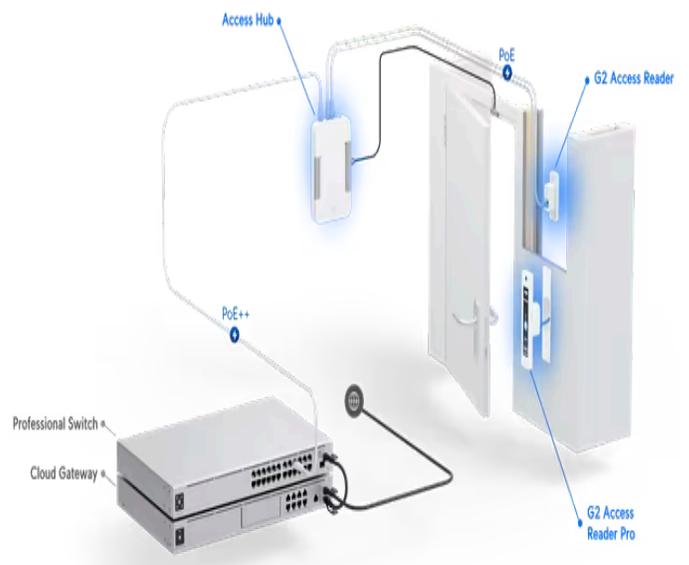

UA-Hub-Door Mechanical

Dimensions 174.9 x 126 x 32.9 mm (6.9 x 5 x 1.3")

Weight 363 g (12.8 oz)

Enclosure material Polycarbonate

Mounting material Polycarbonate

Hardware

Networking interface	(5) 10/100/1000 Base-T
Power method	PoE++ UL 294 Power-limited Class 2 PSU UL 60950/62368 LPS/PS2 PSU
Max. power consumption	Without PoE output: 30W With PoE output: 50W
PoE input	50V DC, 1A
PoE output	PoE passthrough, (4) PoE, 50V DC, total 20W
Button	(1) Factory-reset
LEDs	System: white/blue Output relays: white
Digital input	Request to exit/request to enter/remote release/door position sensor
Dry output relay	Lock: 30V DC, 1A Aux: 30V DC, 1A
Powered output relay	Lock: 12V DC, 1A Aux: 12V DC, 0.33A 12V DC, 0.33A
Operating environment	Indoor use only
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
UL 294 level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
UL 294 statement	Compliance with IEEE 802.3 (at or af) specifications was not verified as part c The equipment is intended to comply with the section of the National Electric 725.121, Power Sources for Class 2 and Class 3 Circuits.
CAN/ULC-60839-11-1 Grade	Grade assignment: 1
Certifications	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1

Document number, and issue date
and/or revision level

UA-Hub-Door002, V01

Wiring Information

Wiring gauge requirements (AWG)	Total length to device	Output load current at 12V DC
		100mA
	6.1 m (20 ft)	22
	15.2 m (50 ft)	22
	30.5 m (100 ft)	22

UACC-Cable-DoorLockRelay (18 AWG) is recommended.

PoE cabling requirements

The minimal conductor gauge permitted to connect between the PSE or power source and the device is 22 AWG (0.21 mm²) for horizontal or riser cable.

LEDs

PoE in	Steady blue: Adopted/device is ready Steady white: Pending adoption Blinking white/blue: Upgrading firmware
PoE out	Off: Not connected or no data link Steady blue: Connected and data link on

UA-G2-Pro Mechanical

Dimensions	160 x 40.4 x 40.55 mm (6.3 x 1.59 x 1.6")
Weight	136 g (4.8 oz)
Enclosure material	Polycarbonate, glass
Mount material	Aluminum alloy

Mounting Wall, gang box

Weatherproofing IP55

Hardware

Networking interface (1) GbE RJ45 port

Connectivity BLE 4.2
NFC

Power method PoE
UL 294 Power-limited Class 2 PSU
UL 60950-1/62368-1 LPS/PS2 PSU

Supported voltage range 48V DC

Max. power consumption 6W

ESD/EMP protection Air: ±15kV, contact: ±8kV

Sensor Proximity sensor

Camera 4000 x 3000, 12 MP, 30 FPS

Microphone Yes

Speaker (1) 4 ohm, 1.5W

LEDs R/G/B/W
Flash

Button (1) Factory-reset

NFC frequency 13.56 MHz

NFC read range < 30 mm

NFC standards ISO 14443A, 14443B, 15693

NFC technology NFC Tag 1,2,3,4,5
MIFARE Classic
MIFAREPlus
MIFARE Ultralight
MIFARE DESFire

Operating environment Outdoor use

Ambient operating temperature Device: -30 to 45° C (-22 to 113° F)
Display:* -10 to 45° C (14 to 113° F)

*The display will turn off when the ambient temperature is above/below the display operator functional. (Effective after firmware v1.3.28)

Ambient operating humidity	5 to 90% noncondensing
Software information	The software version of a product can be checked at https://unifi.ui.com
UL 294 level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
UL 294 statement	Compliance with IEEE 802.3 specifications was not verified as part of UL 294 The equipment is intended to comply with the section of the National Electric Code 725.121, Power Sources for Class 2 and Class 3 Circuits.
PoE cabling requirements	Cable 5e cabling is the minimum performance category recommended. The patch cord must match the transmission speed required at the installation site. The minimal conductor gauge permitted to connect between the PSE or power source and the patch cord is 24 AWG (0.21 mm ²) for horizontal or riser cable.
CAN/ULC-60839-11-1 Grade	Grade assignment: I
Certifications	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1
Document number, and issue date and/or revision level	UA-G2-Pro/UA-G2-Pro-Black, V02

LED

System	Steady blue: Adopted/device is ready Steady white: Pending adoption Blinking white/blue: Upgrading firmware Strobing red: Emergency lockdown
---------------	---

UA-G2

Mechanical

Dimensions	93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")
Weight	82 g (2.9 oz)
Enclosure material	Polycarbonate, glass
Mounting	In wall, gang box

Weatherproofing

IP55

Hardware

Networking interface (1) 10/100 MbE RJ45 port

Connectivity BLE 4.1

Power method PoE
UL 294 Power-limited Class 2 PSU
UL 60950-1/62368-1 LPS/PS2 PSU

Supported voltage range 48V DC

Max. power consumption 5W

ESD/EMP protection Air: ±15kV, contact: ±8kV

Sensors Proximity sensor

Speaker (1) 8 ohm, 0.7W

LEDs R/G/B/W

Button (1) Factory-reset

NFC frequency 13.56 MHz

NFC read range < 30 mm

NFC standards ISO 14443A, 14443B, 15693

NFC technology NFC Tag 1,2,3,4,5
MIFARE Classic
MIFAREPlus
MIFARE Ultralight
MIFARE DESFire

Operating environment Outdoor use

Ambient operating temperature -30 to 45° C (-22 to 113° F)

Ambient operating humidity 5 to 90% noncondensing

Software information The software version of a product can be checked at <https://unifi.ui.com>

UL 294 level Destructive attack: Level I
Line security: Level I

Endurance: Level I
Standby power: Level I

UL 294 statement

Compliance with IEEE 802.3 specifications was not verified as part of UL 294
The equipment is intended to comply with the section of the National Electric
725.121, Power Sources for Class 2 and Class 3 Circuits.

PoE cabling requirements

Cable 5e cabling is the minimum performance category recommended. The p
match the transmission speed required at the installation site.
The minimal conductor gauge permitted to connect between the PSE or power
(0.13 mm²) for patch cords; 24 AWG (0.21 mm²) for horizontal or riser cable.

CAN/ULC-60839-11-1 Grade

Grade assignment: I

Certifications

CE, FCC, IC, UL 294, CAN/ULC-60839-11-1

**Document number, and issue date
and/or revision level**

UA-G2/UA-G2-Black, V02

LED

System

Steady blue: Adopted/device is ready
Steady white: Pending adoption
Blinking white/blue: Upgrading firmware
Strobing red: Emergency lockdown

**UA-Pocket
Mechanical**

Dimensions

84 x 39 x 7.4 mm (3.3 x 1.5 x 0.29")

Weight

16 g (0.56 oz)

Enclosure material

Polycarbonate, stainless steel

Weatherproofing

IP54

Hardware

NFC frequency

13.56 MHz

NFC technology

ISO/IEC 14443 Type A
MIFARE DESFire EV3 4K

UniFi Access Proprietary Security Protocol

Ambient operating temperature	-10 to 45° C (14 to 113° F)
Ambient operating humidity	10 to 90% noncondensing
Certification	CE

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.