



Search UniFi products

Hubs > [Door Hub Mini](#)

Datasheet

Marketing Images

Installation Guide

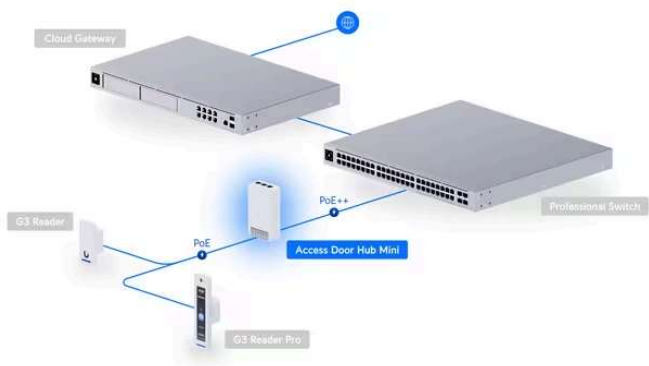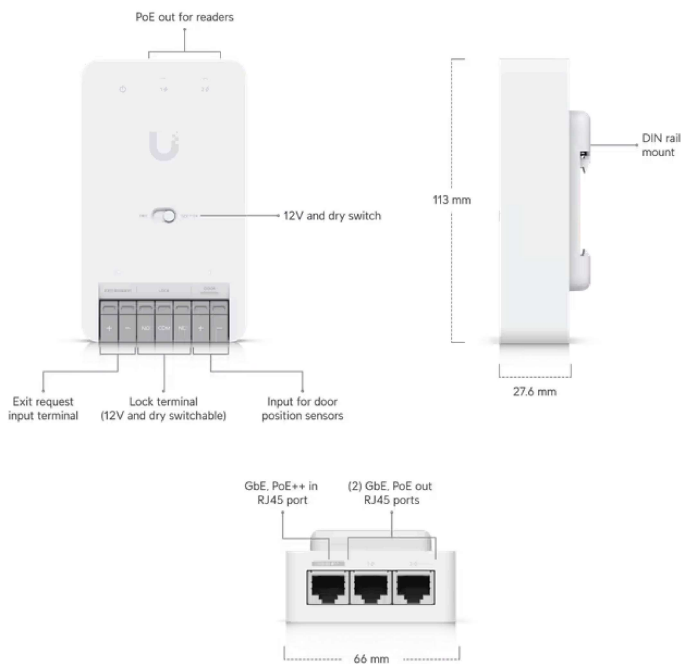

^ Overview

Dimensions	113 x 66 x 27.6 mm (4.4 x 2.6 x 1.1")
UniFi Application Suite	
Access	✓
Supported Doors	1

Input Terminals	(1) Door exit request (1) Door position
Power Method	PoE++ UL 294 Power-limited Class 2 PSU UL 60950-1/62368-1 LPS/PS2 PSU
NDAA Compliant	✓
UL 294 Level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
^ <b>Mechanical</b>	
Weight	190 g (6.7 oz)
Enclosure Material	Polycarbonate, metal
Mounting	DIN-rail (Included)
^ <b>Hardware</b>	
Dry Output Relay	30V DC, 1A
Indoor and Outdoor Use	Indoor only
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	5 to 90% noncondensing
Networking Interface	(3) GbE RJ45 ports
PoE Interface	(1) PoE++ input, 50V DC, 1A (2) PoE outputs, total 31W
Max. Power Consumption	19W (Without PoE output) 50W (With PoE output)
LEDs	W/B <a href="#">Learn More</a>
Buttons	(1) Factory-reset (1) Dry/Wet switch
Recommend Max. Cable Length	

UA-Lock-Electric (400mA)	24 AWG length: 25 m (82 ft) 22 AWG length: 42 m (138 ft) 20 AWG length: 66 m (217 ft) 18 UACC-Cable-DoorLockRelay length: 100 m (328 ft)
UA-Lock-Magnetic-540kg (500mA)	24 AWG length: 12 m (29 ft) 22 AWG length: 20 m (66 ft) 20 AWG length: 30 m (98 ft) 18 UACC-Cable-DoorLockRelay length: 46 m (262 ft)
UA-Lock-Magnetic-270kg (800mA)	24 AWG length: 12 m (29 ft) 22 AWG length: 20 m (98 ft) 20 AWG length: 30 m (167 ft) 18 UACC-Cable-DoorLockRelay length: 46 m (151 ft)
Other locks (1A)	24 AWG length: 9 m (30 ft) 22 AWG length: 15 m (49 ft) 20 AWG length: 24 m (79 ft) 18 UACC-Cable-DoorLockRelay length: 36 m (118 ft)
PoE Cabling Requirements	<p>Cat 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site.</p> <p>The minimal conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG (0.13 mm<sup>2</sup> ) for patch cords; 24 AWG (0.21 mm<sup>2</sup> ) for horizontal or riser cable.</p>
UL 294 Statement	<p>Compliance with IEEE 802.3 specifications was not verified as part of UL 294.</p> <p>The equipment is intended to comply with the section of the National Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits.</p>
CAN/ULC-60839-11-1 Grade	Grade assignment: I
Certifications	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1
Document number, and issue date and/or revision level	UA-Hub-Door-Mini, V01
^ <b>Software</b>	
Management Application	Access
Software Information	The software version can be checked at <a href="https://unifi.ui.com">https://unifi.ui.com</a>

### Stay in Touch

Email



Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.