
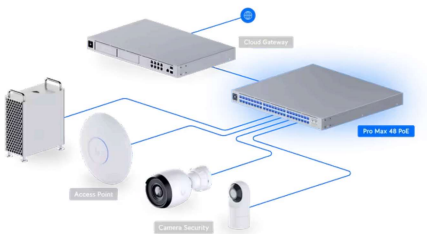
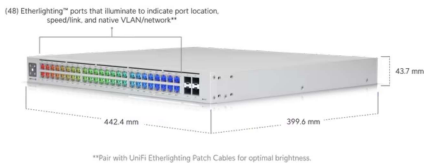


🔍 Search UniFi products

Switching WiFi Camera Security Door Access Integrations Advanced Hosting

Professional Max & XG > [Pro Max 48 PoE](#)

Datasheet In The Box Marketing Images Installation Guide

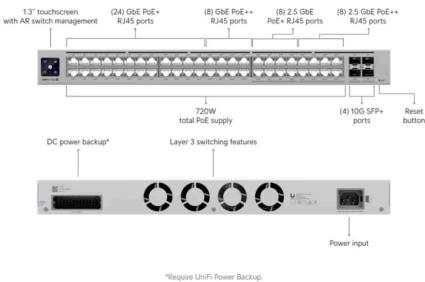

Overview

Dimensions	442.4 x 400 x 44 mm (17.4 x 15.7 x 1.7")
Port Layout	
1 GbE RJ45	32 (24 PoE+; 8 PoE++) (1G/100M/10M)
2.5 GbE RJ45	16 (8 PoE+; 8 PoE++) (2.5G/1G/100M/10M)
10G SFP+	4 (10G/1G)
Max. PoE Output	Up to PoE++
Total PoE Availability	720W
Redundancy	DC Power Backup
Layer 3	✓

Form Factor	Rack mount (1U)
-------------	-----------------

Etherlighting™	✓
----------------	---

^ **Performance**

Switching Capacity	224 Gbps
--------------------	----------

Total Non-Blocking Throughput	112 Gbps
-------------------------------	----------

Forwarding Rate	167 Mpps
-----------------	----------

Supported VLANs	1,000
-----------------	-------

MAC Address Table Size	32,000
------------------------	--------

L3 Table Size	
---------------	--

ARP Entries	12,000
-------------	--------

IPv4 Routes	12,000
-------------	--------

Packet Buffer Size	2 MB
--------------------	------

Access Lists	
--------------	--

IPv4	128
------	-----

MAC	128
-----	-----

^ **Layer 3 Features**

DHCP Server (Local Networks)	✓
------------------------------	---

DHCP Relay	✓
------------	---

Inter-VLAN Routing (Local Networks)	✓
-------------------------------------	---

Static Routing (Local Networks)	✓
---------------------------------	---

^ **Layer 2 Features**

LACP Port Aggregation	✓
-----------------------	---

STP & RSTP	✓
------------	---

QoS (DSCP)	✓
------------	---

Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓
--	---

Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓

^ **Hardware**

PoE Ports

PoE+	32
------	----

PoE++	16
-------	----

Max. PoE Wattage per Port by PSE

PoE	15.4W
-----	-------

PoE+	32W
------	-----

PoE++	64W
-------	-----

Max. Power Consumption	100W (Excluding PoE Output) 820W (Including PoE Output)
Power Method	(1) Universal input, 100—240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 870W
Supported Voltage Range	100—240V AC
Management	Ethernet AR
Heat Dissipation (Excluding PoE Output)	341.2 BTU/hr
Weight	Without mounting brackets: 6.2 kg (13.7 lb) With mounting brackets: 6.3 kg (13.9 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
ESD Protection	Air: $\pm 16\text{kV}$, contact: $\pm 12\text{kV}$
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP+	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel

[^] **Software**

Application Requirements

UniFi Network	Version 8.0.24 and later
---------------	--------------------------

Stay in Touch

Email



Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.