

Search UniFi products


Utility > Flex Mini 2.5G

Datasheet


In The Box

Marketing Images

Installation Guide

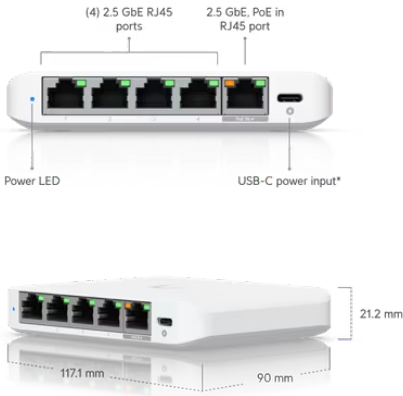

*Optional powering with included 5V, 1A USB-C adapter

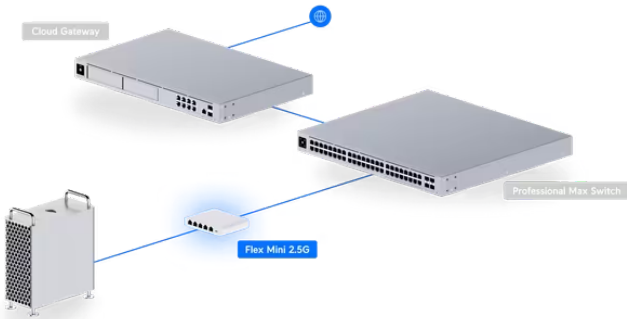

^ Overview

Dimensions	117.1 x 90 x 21.2 mm (4.6 x 3.5 x 0.8")
Port Layout	
2.5 GbE RJ45	5 (2.5G/1G/100M/10M)
Form Factor	Compact desktop

^ Performance

Switching Capacity	25 Gbps
Total Non-Blocking Throughput	12.5 Gbps

Forwarding Rate	19 Mpps
Supported VLANs	256
MAC Address Table Size	4,000
^ Layer 2 Features	
STP & RSTP	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
Loop Protection	✓
^ Hardware	
Max. Power Consumption	5W (AC/DC input) 6.4W (PoE input)
Power Method	(1) USB Type-C, 5V DC, 1A (1) PoE
Power Input Method	USB Input PoE
Power Supply	AC/DC, external, 5W
Supported Voltage Range	4.8—5.2V DC/USB 44V—57V PoE
Management	Ethernet
Weight	206 g (7.3 oz)
Enclosure Material	Polycarbonate
Ambient Operating Temperature	-20 to 45° C (-4 to 113° F)
Ambient Operating Humidity	10 to 90% noncondensing

NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel
^ Software	
Application Requirements	
UniFi Network	Version 8.6.9 and later

Stay in Touch



[Subscribe](#)

